MELARKO

LABELLING EQUIPMENT

Label rewinders RW-100 / RW-200

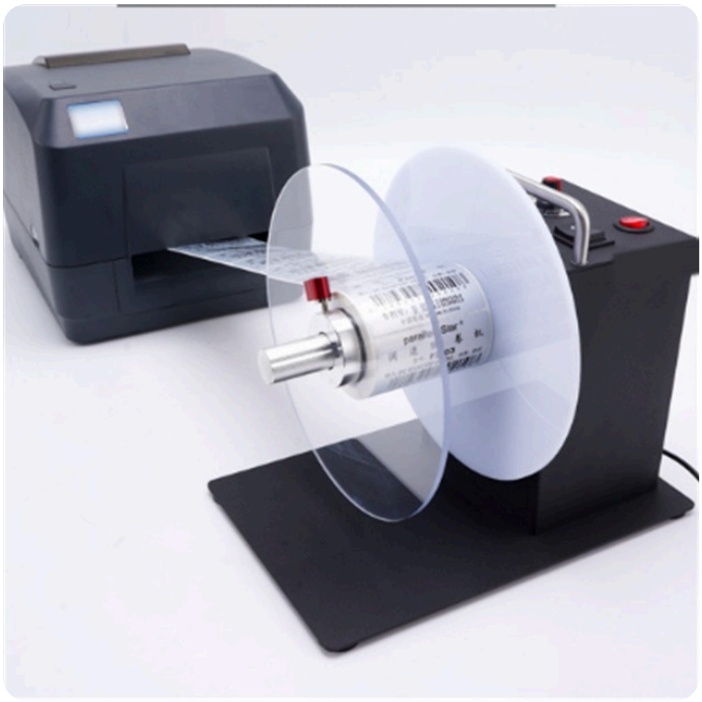

Automatic label rewinders that wind printed labels into a tight, even roll while the printer runs. No more winding by hand, and no more labels trailing on the floor collecting dust.

Key benefits

- Automatically follows the printer speed, up to 254 mm/s (10″/s), without pulling the web
- Sensor rod (dancer) starts and stops rewinding on its own
- Cores of 25 mm (1″), 40 mm and 76 mm (3″)
- Labels up to 120 mm wide, rolls up to Ø 200 mm
- Side flanges for neat, even rolls
- Solid metal chassis with carrying handle







MELARKO

Label rewinders RW-100 / RW-200

Two versions

RW-100 · one-way

Rewinds in one direction. Magnetic shaft that also works without a paper core, so the finished roll slides off easily. Simple on/off switch.

RW-200 · two-way

Forward/reverse switch to wind labels face-in or face-out, for re-printing, application or storage.

Specifications

Operation	Automatic rewinding, synchronised with the printer
Rewind direction	RW-100: one way · RW-200: two way (switch)
Speed	up to 254 mm/s (10″/s)
Max. label width	120 mm
Max. roll diameter	200 mm
Core	25 mm (1″), 40 mm, 76 mm (3″)
Power	100–240 V AC, 50/60 Hz · output 12 V DC, 2 A
Dimensions (L×W×H)	260 × 170 × 205 mm

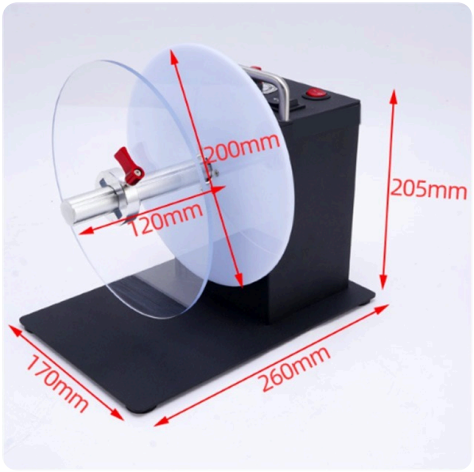

Typical use

Next to desktop and industrial thermal-transfer printers (Zebra, TSC, Godex and others) for label batches applied later by hand or with a labeller, in warehouses, logistics, food and pharmacy.

Specifications subject to change without notice.